





# ClickN Kids Tablet Battery Replacement

This is a guide for replacing the battery in the device

Written By: Kevin Finney

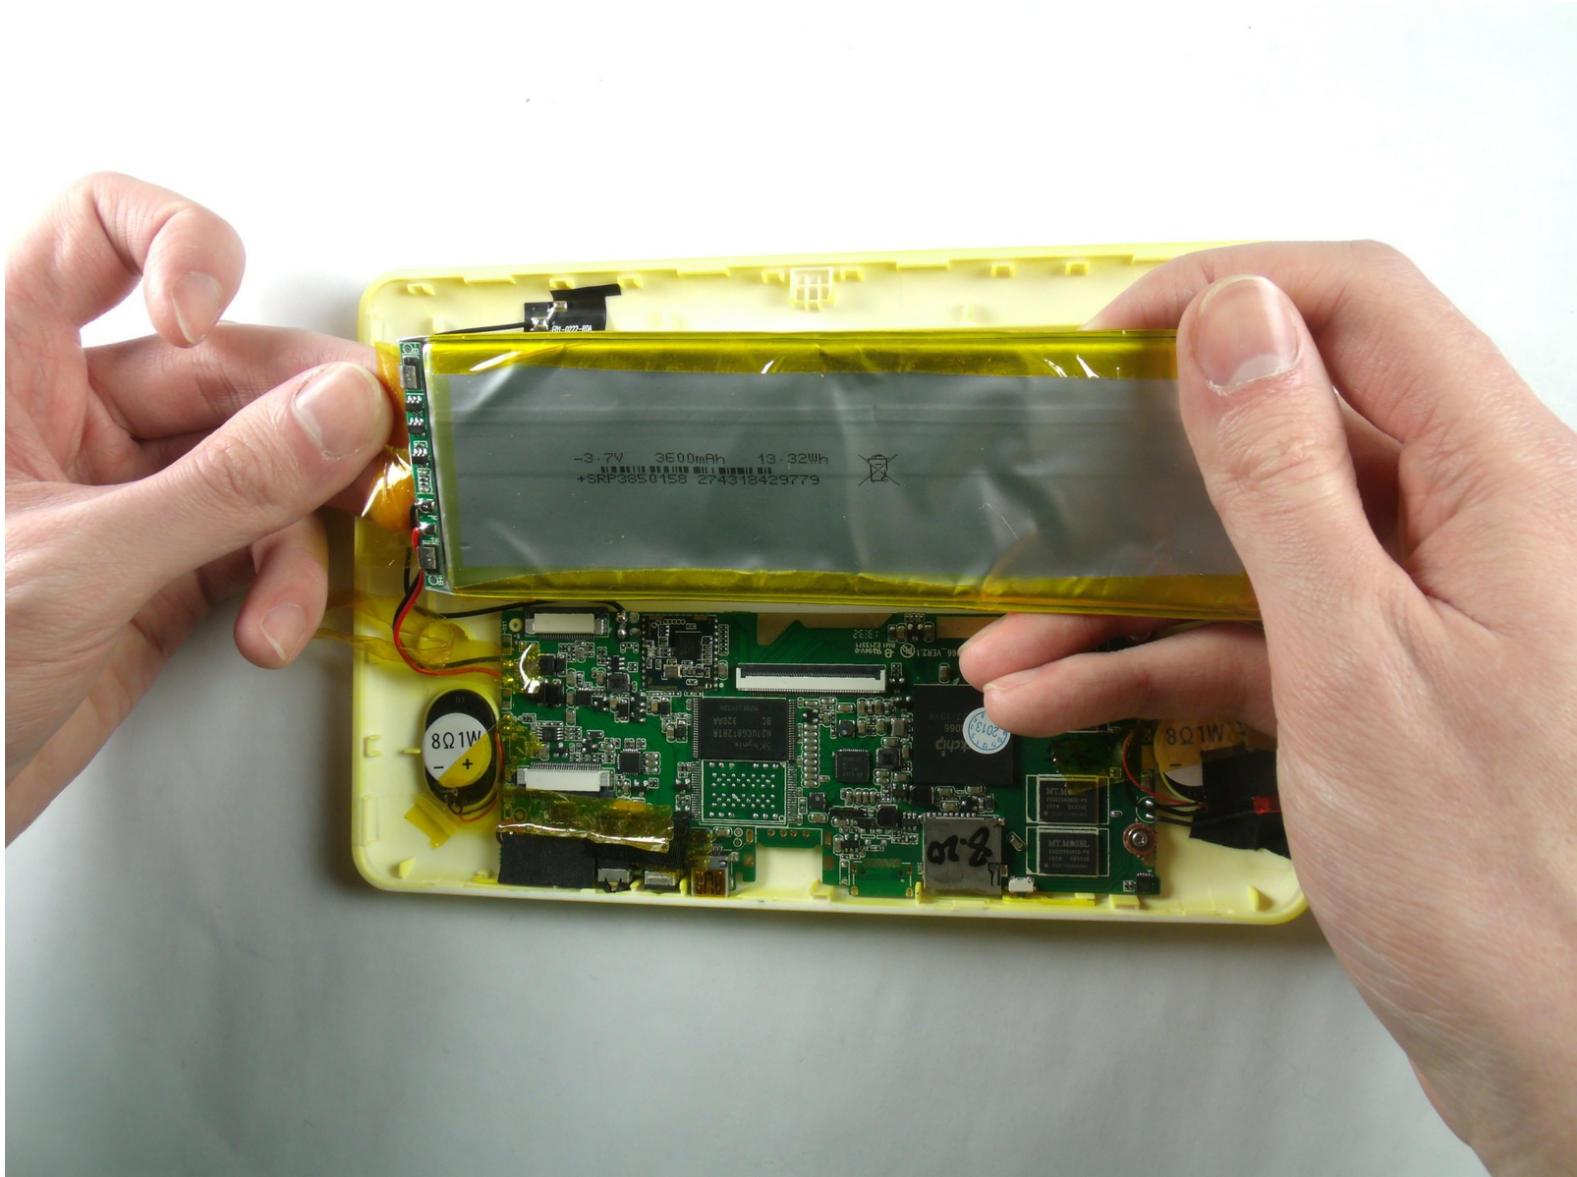


## Step 1 — Battery

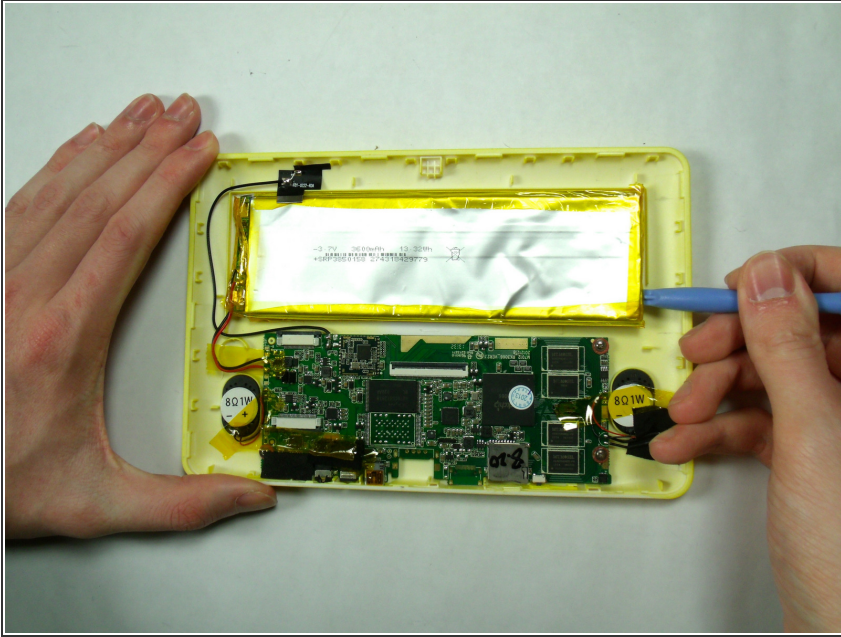

- Follow the [camera replacement guide](#) to access the battery.

## Step 2

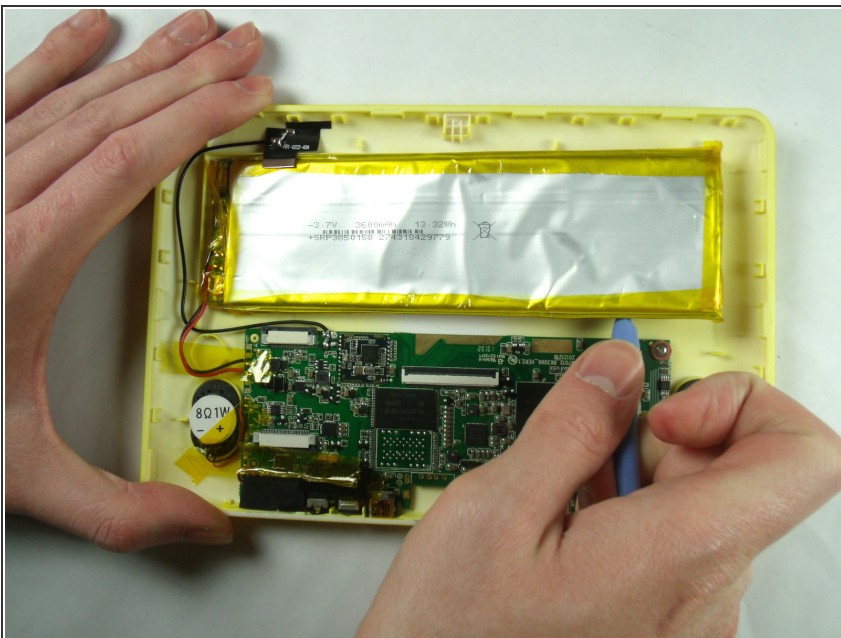

- ⓘ The battery is connected to the back side by a strong adhesive.
- ⓘ The battery may bend during this process.
- ⚠ Be careful not to damage the wires or the black tab attached to the battery.
- ⚠ Be careful not to allow the battery to bend any more than necessary. Battery acid leakage is possible.
- Pry the battery off the back side with a plastic opening tool.




### Step 3




- Pull the tape off the side with the wires and circuit piece.

### Step 4

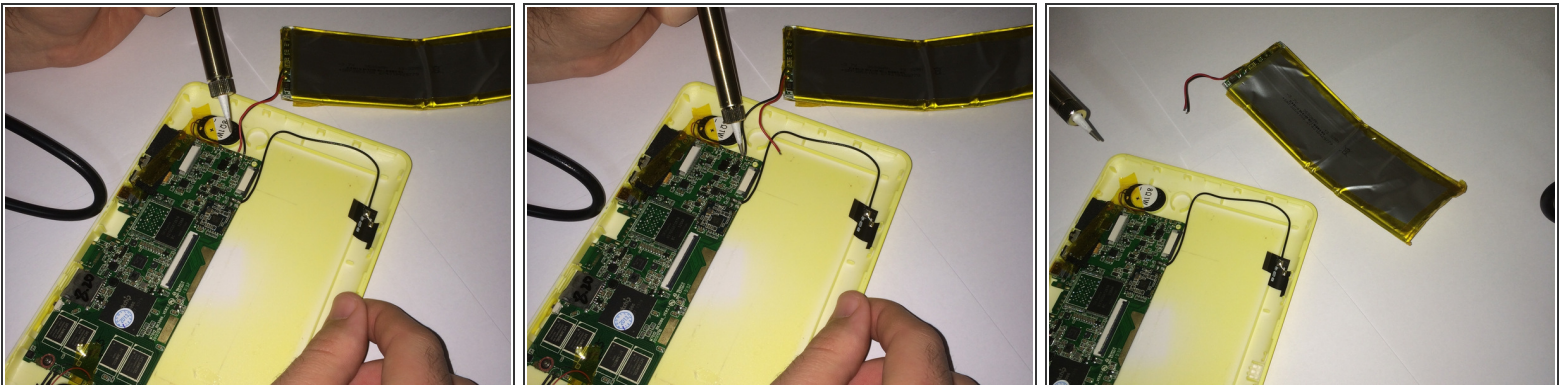

 Have someone who is skilled in soldering to perform this step.

 Be careful not to destroy the motherboard or other parts of device.

- Desolder the wires connecting the battery to the motherboard from the contact points on the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-03 06:54:57 PM.